

FS-700/890

Recycling (FS-890R)
Ventilating (FS-700V/890V)



SPECIFICATIONS (BASED ON 230V)

DIMENSIONS (WxDxH) (mm)

FS-700 (V) 700 X 550 X 150

FS-890 (R,V) 890 X 550 X 150

AIRFLOW (LOW/MID/HI) (m³/h)

FS-700 (V) 365 / 460 / 595

FS-890 (R) 340 / 425 / 545 (V) 350 / 445 / 565

SOUND LEVEL (LOW/MID/HI) dB(A)

FS-700 (V) 39 / 45 / 52

FS-890 (R) 42 / 47 / 54 (V) 41 / 47 / 53

OIL FUMES CAPTURE

FS-700 (V) 93% FS-890 (R,V) 92%

POWER CONSUMPTION WITH LAMP

(LOW/MID/HI) (watt)


FS-700 (V) 68 / 88 / 123

FS-890 (R) 68 / 88 / 118 (V) 68 / 88 / 118

WEIGHT (kg)

FS-700 (V) 15 FS-890 (R,V) 17

INSTALLATION DETAILS

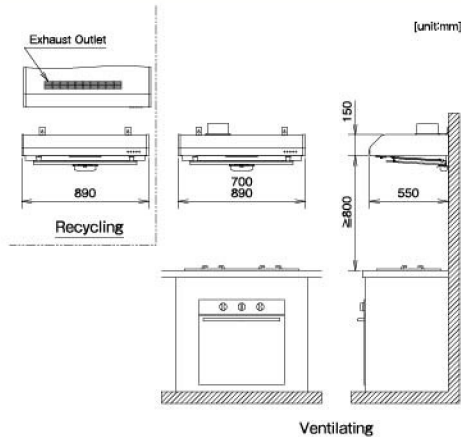

ACCESSORIES

FILTER



- Fancy Clean Silicone Coated Slot Filter

OPTIONAL PARTS UPGRADE



- Aqua Slit Filter
- Optional Filter only for FS-890 RV.

Optional - customers can upgrade their set to one that comes with the Aqua Slit Filter instead of the Fancy Clean Silicone Coated Slot Filter. And customers need to note that there is a price difference.

FEATURES

- Fancy Clean Silicone Coated Slot Filter eliminates oily build-ups, and is anti-rust, washable and easy to clean.
- Technologically Advanced Removable Rectifier Panel.
- Sirocco Fan.
- Oil Catch Tray.
- Fire-retardant Body.
- Utility Light.
- Push Button-Switch Panel.