



FX-900

Recycling (FX-900R)
Ventilating (FX-900V)

*Available only in Stainless Steel



PSB Test ref. no. 54S070852/CF0*

SPECIFICATIONS (BASED ON 230V)

DIMENSIONS (WxDxH) (mm)

(R / V) 900 X 590 X 157

AIR FLOW (LOW/MID/HI) (m³/h)

(R) 275 / 385 / 450 (V) 290 / 430 / 540

SOUND LEVEL (LOW/MID/HI) dB(A)

(R) 47 / 55 / 60 (V) 43 / 52 / 58

OIL FUMES CAPTURE

(R) 83%* (V) 85%


POWER CONSUMPTION WITH LAMP (LOW/MID/HI) (watt)

(R) 135 / 145 / 165 (V) 140 / 160 / 175

WEIGHT (kg)

(R) 16 (V) 17

INSTALLATION DETAILS

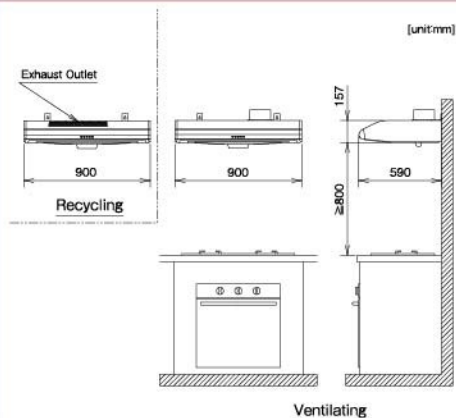

ACCESSORIES

FILTER



- Aluminum Slot Filter

FEATURES

- Aluminum Slot Filter eliminates oily build-ups, and is washable and easy to clean.
- Technologically Advanced Removable Rectifier Panel.
- Sirocco Fan.
- Oil Catch Tray.
- Fire-retardant Body.
- Utility Light.
- Push Button-Switch Panel.