



NL-900

Recycling (NL-900R)
Ventilating (NL-900V)



SPECIFICATIONS (BASED ON 230V)

DIMENSIONS (WxDxH) (mm)

(R,V) 900 X 640 X 685
(Extension Duct Cover available)

AIRFLOW (LOW/MID/HI) (m³/h)

(R) 340 / 415 / 500 (V) 370 / 465 / 595

SOUND LEVEL (LOW/MID/HI) dB(A)

(R) 45 / 50 / 55 (V) 40 / 46 / 51

OIL FUMES CAPTURE

(R) 83% (V) 80%


POWER CONSUMPTION WITH LAMP (LOW/MID/HI) (watt)

(R,V) 95 / 115 / 145

WEIGHT (kg)

(R) 25 (V) 24

INSTALLATION DETAILS

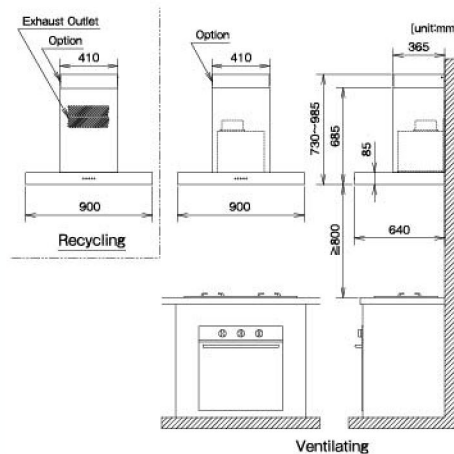

ACCESSORIES

FILTER



- Fancy Clean Silicone Coated Slot Filter

OPTIONAL PARTS

Extension Duct Cover (sold separately)
NLD-100 Hood Height: 730-785mm
NLD-200 Hood Height: 785-885mm
NLD-300 Hood Height: 885-985mm (maximum)

FEATURES

- Fancy Clean Silicone Coated Slot Filter eliminates oily build-ups, and is anti-rust, washable and easy to clean.
- Oil Catch Tray is not available for this model.
- Technologically Advanced Removable Rectifier Panel.
- Sirocco Fan.
- Fire-retardant Body.
- Utility Light.
- Push Button-Switch Panel.

All specifications are based on stringent in-house test results conducted in Fujii Industrial Co., Ltd, Japan