



# FX-900

Recycling (FX-900R)  
Ventilating (FX-900V)

\*Available only in Stainless Steel



PSB Test ref no 545070852/CFO\*

## SPECIFICATIONS (BASED ON 230V)

**DIMENSIONS (WxDxH) (mm)**  
(R / V) 900 X 590 X 157

**AIR FLOW (LOW/MID/HI) (m<sup>3</sup>/h)**  
(R) 275 / 385 / 450 (V) 290 / 430 / 540


**SOUND LEVEL (LOW/MID/HI) dB(A)**  
(R) 47 / 55 / 60 (V) 43 / 52 / 58

**OIL FUMES CAPTURE**  
(R) 83%\* (V) 85%

**POWER CONSUMPTION WITH LAMP  
(LOW/MID/HI) (watt)**  
(R) 135 / 145 / 165 (V) 140 / 160 / 175

**WEIGHT (kg)**  
(R) 16 (V) 17

## INSTALLATION DETAILS

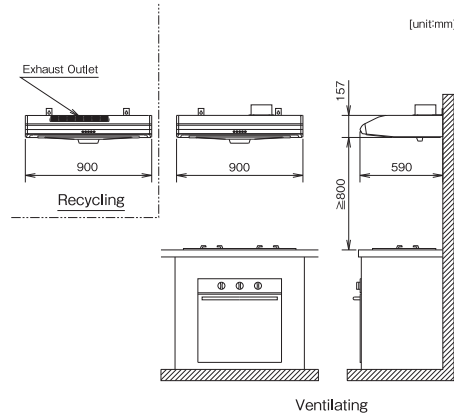

## ACCESSORIES

### FILTER



- Aluminum Slot Filter

## FEATURES

- Aluminum Slot Filter eliminates oily build-ups, and is washable and easy to clean.
- Technologically Advanced Removable Rectifier Panel.
- Sirocco Fan.
- Oil Catch Tray.
- Fire-retardant Body.
- Utility Light.
- Push Button-Switch Panel.